


J67 SERIES



MODULAR JACK CONNECTORS: 4 PORT RJ45 WITH LEDS, TAB UP RIGHT ANGLE PCB MOUNT, NON-SHIELDED, 2.54MM FOOTPRINT

Features:

- Top performance for high speed networking, voice and data applications
- Meet FCC PART 68, Subpart F requirements
- Available in Tab-up
- Applications: Telecommunications, Broadcast, Data Products
- RoHS Compliant

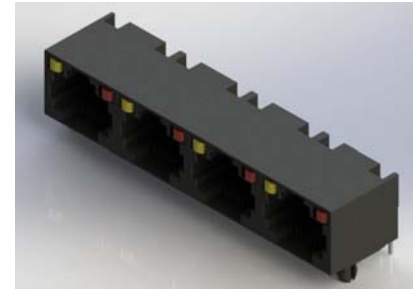

Specifications:

| | |
|---------------------------------|---|
| Housing Material | PBT or Nylon |
| Contact Material | Phosphor Bronze |
| Contact Plating | Gold Plating on contact area and Tin Plating on tails with Nickel underplating all over |
| Current Rating | 1.5 amps @25°C |
| Voltage Rating | 125 V AC |
| Contact Resistance | 20 milliohms maximum |
| Dielectric Withstanding Voltage | 1000 V AC |
| Insulation Resistance | 500 megaohms minimum |
| Durability | 750 cycles minimum |
| Operating Temperature | -40°C to +85°C |
| Wave Soldering Process | 260°C ± 5°C, 5~10 Seconds |


Ordering Code:

EXAMPLE PART NUMBER: J67048822P00011

SERIES:
RJ MODULAR JACK

HOUSING TYPE:

67-



NO. OF PORTS:
04 - 4 PORT

NO. OF CONTACTS PER PORT:
88 - 8P8C

CONTACT PLATING:
2 - GOLD FLASH
3 - 15 MICROINCHES OF GOLD
6 - 30 MICROINCHES OF GOLD
9 - 50 MICROINCHES OF GOLD

CONTACT TAIL TYPE:
2 - RIGHT ANGLE PCB

HOUSING MATERIAL:
P - PBT
N - NYLON

MOUNTING OPTIONS:
1 - BOARD LOCKS

PORT TYPE:
1 - SINGLE ROW (TAB UP)

SHIELDING:
0 - NO SHIELD

RIGHT LED COLOR:
1 - YELLOW
2 - RED
3 - GREEN
4 - ORANGE
5 - BI-COLOR (GREEN/YELLOW)
6 - BI-COLOR (RED/GREEN)
7 - BI-COLOR (GREEN/ORANGE)
8 - BI-COLOR (RED/YELLOW)

LEFT LED COLOR:
1 - YELLOW
2 - RED
3 - GREEN
4 - ORANGE
5 - BI-COLOR (GREEN/YELLOW)
6 - BI-COLOR (RED/GREEN)
7 - BI-COLOR (GREEN/ORANGE)
8 - BI-COLOR (RED/YELLOW)